
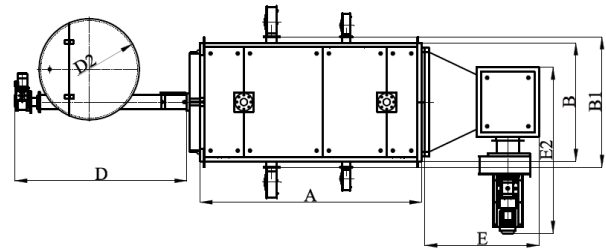


widok z boku



widok z góry

| MOC (kW) | A | A1 | B | B1 | C | C1 | C2 | D | D1 | D2 | E | E1 | E2 | F | G | S |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) |
| 150 | 2100 | 2220 | 1120 | 1250 | 1800 | 1900 | 780 | 1900 | 1650 | 1100 | 900 | 2000 | 1750 | 80 | 80 | 20 |
| 200 | 2250 | 2400 | 1320 | 1470 | 2085 | 2185 | 780 | 1900 | 1650 | 1100 | 900 | 2370 | 1880 | 80 | 80 | 20 |
| 300 | 2250 | 2400 | 1320 | 1470 | 2305 | 2405 | 1000 | 1900 | 1650 | 1100 | 900 | 2590 | 1880 | 100 | 100 | 20 |
| 500 | 2530 | 2630 | 1340 | 1490 | 2750 | 2850 | 1320 | 1900 | 1650 | 1100 | 1300 | 2980 | 1880 | 100 | 100 | 20 |
| 600 | 2530 | 2680 | 1340 | 1490 | 2860 | 2960 | 1430 | 1900 | 1650 | 1100 | 1300 | 3090 | 1880 | 125 | 125 | 20 |
| 780 | 3250 | 3400 | 1340 | 1490 | 3030 | 3130 | 1435 | 1900 | 1650 | 1100 | 1750 | 3190 | 2445 | 125 | 125 | 20 |
| 980 | 3530 | 3680 | 1520 | 1670 | 2915 | 3015 | 1330 | 1900 | 1650 | 1100 | 1750 | 3100 | 2445 | 150 | 150 | 20 |
| 1250 | 3550 | 3700 | 1520 | 1670 | 3250 | 3350 | 1550 | 1900 | 1650 | 1100 | 2050 | 3450 | 2740 | 150 | 150 | 20 |
| 1500 | 3550 | 3700 | 1720 | 1870 | 3250 | 3350 | 1550 | 1900 | 1650 | 1100 | 2050 | 3450 | 2740 | 200 | 200 | 20 |

| Parametry | | 150 | 200 | 300 | 500 | 600 | 780 | 980 | 1250 | 1500 |
|--------------------------------------|-------------------|---------|-------|-------|-------|-------|-------|-------|--------|--------|
| moc nominalna | kW | 150 | 200 | 300 | 500 | 600 | 780 | 980 | 1250 | 1500 |
| orientacyjna kubatura ogrzewania | m ³ | 3024 | 4200 | 6300 | 10000 | 13400 | 16800 | 21000 | 27300 | 31500 |
| max dopuszczalne ciśnienie | bar | 1,5 | | | | | | | | |
| max temperatura wody | °C | 95 | | | | | | | | |
| sprawność kotła | % | 83 | | | | | | | | |
| napięcie zasilania | V | 400 | | | | | | | | |
| moc urządzeń elektrycznych | kW | 6,2 | 6,2 | 6,2 | 7,2 | 7,2 | 9,9 | 9,9 | 12,5 | 12,5 |
| średnie zużycie paliwa | kg/h | 38 | 51 | 76 | 127 | 153 | 199 | 250 | 319 | 383 |
| objętość zbiornika standardowego | m ³ | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| czas pracy na zbiorniku standardowym | h | 6,6 | 5 | 3,3 | 2 | 1,6 | 1,3 | 1 | 0,8 | 0,6 |
| spadek ciśnienia wody (10K) | mbar | 162 | 211 | 330 | 385 | 451 | 535 | 605 | 710 | 761 |
| spadek ciśnienia wody (20 K) | mbar | 91 | 131 | 189 | 226 | 252 | 335 | 386 | 449 | 491 |
| min. temperatura aktywująca pompy | °C | 50 | | | | | | | | |
| pojemność wody | L | 1050 | 1200 | 1500 | 2400 | 2500 | 3300 | 3900 | 4400 | 4900 |
| temperatura spalin | °C | 180-220 | | | | | | | | |
| spadek ciśnienia kominowego | Pa | ±20 | | | | | | | | |
| średnica i wysokość kominu | mm/m | 300/8 | 350/8 | 350/8 | 400/8 | 400/8 | 500/8 | 500/8 | 500/10 | 600/10 |
| wymagany ciąg za kominem | Pa | 55 | 55 | 55 | 60 | 60 | 60 | 65 | 65 | 70 |
| przepływ gazów odlotowych | m ³ /h | 266 | 355 | 533 | 888 | 1065 | 1385 | 1740 | 2220 | 2663 |
| masa kotła (tolerancja±5%) | kg | 2600 | 3400 | 4200 | 5800 | 6600 | 9000 | 10500 | 12100 | 14200 |